



IP730D (LTE + VHF)
IP740D (LTE + UHF)

HYBRID IP TRANSCEIVERS

LTE
Transceiver

IDAS™
Transceiver



Hybrid Handheld IP Radio for
Local & Nationwide Communications



Innovative LTE Radios with Licensed Professional Radio Mode for Increased Capacity and Coverage

The IP730D and IP740D are dual mode “hybrid” radios that provide nationwide coverage over LTE networks and conventional VHF/UHF professional radio mode (IDAS™ digital/analog mode).




HYBRID IP TRANSCEIVERS
IP730D (LTE + VHF)
IP740D (LTE + UHF)

HYBRID
LTE X IDAS

LTE Mode

LTE mode provides secure private push-to-talk communication over an LTE (4G) and 3G network*. The LTE communication range of the IP730D is limited only by the cellular service area. Experience the benefit of timely information transmission without worrying about restrictions on call distance or dead zones.

*Network coverage provided by a custom SIM card. Service availability depends on the country.

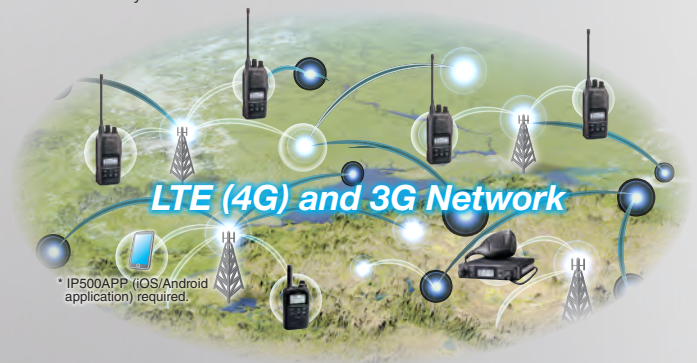

IDAS™ Mode

IDAS™ digital mode is a conventional VHF/UHF radio mode using licensed professional radio channels. It also provides Individual, Group and All calls with PTT operation. When operating in remote, mountainous areas, LTE (4G)/3G networks may not be available. Conventional VHF/UHF communications provide a stable, local alternative.



IDAS™
ICOM DIGITAL ADVANCED SYSTEM



Large-scale disaster



When network congestion occurs




Remote, mountainous areas


Dual Mode

The IP730D series can receive both communications from an LTE radio group and IDAS™ (or analog) group at a time (audio mixed). You can press either the main PTT for LTE or the sub PTT button for IDAS™ or analog channel to answer in accordance with pre-programming. If necessary, you can press the main and sub PTT buttons to address two groups at the same time.

Expand an existing IDAS™ system with an LTE network

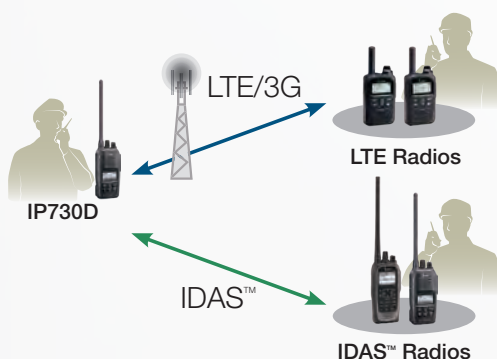

Communication redundancy, when network congestion occurs or network service is temporarily unavailable

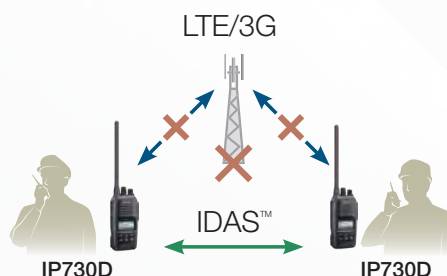

Bridge Function

The Bridge function* relays received IDAS™ digital (or analog) audio to the LTE radio group, while transferring the LTE radio conversations to the IDAS™ digital (or analog) group. This function is useful when communicating outside of the LTE service coverage area with a conventional digital/analog radio, or temporary cross band connection between two conventional digital/analog radio groups using different frequencies or channels.

* When using the Bridge function, operating time will be shorter and output power of the IP730D/IP740D is reduced to 1 W.

The Bridge function may be prohibited in some countries. Please check the legal requirements in your country before using this function.

IDAS™/Analog Group ↔ IP730D ↔ LTE Group




VHF ↔ IP730D ↔ IP740D ↔ UHF



Sub PTT Button for Dual Mode Operation

The IP730D series has two PTT buttons; the main PTT button and the sub PTT button. Use one for LTE communication and the other for an IDAS™/Analog channel. The sub PTT button offers smooth switching between talking on LTE and IDAS™/Analog channels.

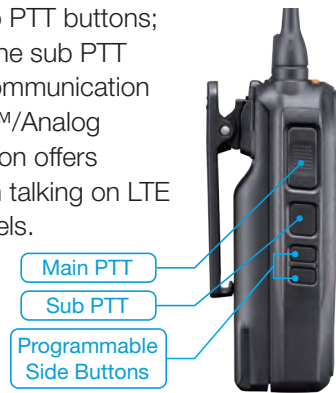

Full-Duplex Communication in LTE Mode

The IP730D series provides full-duplex operation in LTE mode. This allows users to talk and receive at the same time, much like a telephone conversation.

1500 mW Powerful Audio

Icom's custom high-power capacity speaker delivers loud 1500 mW* audio output with improved acoustic sound clarity for noisy environments.


* Typical at 10% distortion.



Built-in Bluetooth® Technology

Built-in Bluetooth® capability provides wireless operation with a Bluetooth accessory.

The optional Bluetooth® headset, VS-3 has PTT and programmable buttons.



Bluetooth® Unit

GPS Data Transmission Capability

The IP730D series includes a built-in GPS receiver that can automatically transmit position data at programmed intervals*. (Common to LTE and IDAS™ mode)

* GPS mapping software is required separately. (Mapping software availability may vary by region.)

IP67 Waterproof and Dust-Tight Specification

The IP730D series is durable enough to endure water pressure under 1- meter depth for 30 minutes, and has dust-tight protection. The radio meets MIL-STD-810 specifications.



Emergency Call Features

By holding down the orange emergency button, users can transmit an emergency call.

In addition, the radio includes three emergency related functions: Man Down, Lone Worker and Motion/Stationary Detection

functions. If one of these functions is activated, the radio automatically transmits emergency signals to alert your controller or dispatcher of any potential trouble.

(Common to LTE and IDAS™ mode)



Emergency button

Digital Voice Recording/Playback

The IP730D series can record incoming calls of up to 4 minutes, or a maximum of 10 messages, and the user can check recorded communications.

RoIP Gateway to Link to Other Systems

With the VE-PG4 RoIP gateway, the IP730D series can interconnect with an IP phone and various radio systems including Wi-Fi radio, satellite PTT, LTE, IDAS™ and analog radios.



Communication Links

Other Features

General Features

- 136 – 174, 350 – 470, 400 – 520 MHz versions
- 128 Channels/8 Zones
- Rotary encoder with channel announcement function^{*1}
- DTMF code transmission with optional DTMF microphone, HM-245T
- Vibration alert function
- Surveillance function
- AquaQuake™ function prevents audio degradation from a water-logged speaker

IDAS™ Operating Mode

- NXDN™ conventional
- NXDN™ multi-site conventional over IP network
- IDAS™ digital simulcast

IDAS™ Digital Functions

- Over-the-Air Programming (OTAP) function updates the radio configuration over the LTE
- Over-the-Air Alias (OAA)^{*1} displays the caller's name without programming
- Up to 500 ID numbers for IDAS™ mode can be saved in the Call List
- Individual, Group and All calls
- 56-bit DES encryption
- Digital voice scrambler (15-bit encryption)
- Talk back

Analog Functions

- CTCSS and DTCS
- 12.5 kHz channel spacing

^{*1} These functions will be available with future firmware upgrades.

Supplied accessories:

(May differ, or not supplied, depending on version)

BP-303
battery pack



MB-133
belt clip



SPECIFICATIONS

GENERAL		IP730D & IP740D	
Audio output power (8 Ω load)	Internal SP	1500 mW typ. (10% distortion), 1300 mW typ. (5% distortion)	
	External SP	1000 mW typ. (10% distortion), 650 mW typ. (5% distortion)	
	HM-222H	1500 mW typ. (10% distortion), 1300 mW typ. (5% distortion)	
Operating temperature range		-30 °C to +60 °C, -22 °F to +140 °F	
Power supply voltage		7.5 V DC nominal	
Current drain (approximate)	Receive	Max. audio (INT SP) 520 mA, Stand-by 300 mA	
	Transmit	Hi (5 W) 1.8 A	
Dimensions (H × W × D; Projections not included)		140.5 × 61.7 × 42.8 mm, 5.5 × 2.4 × 1.7 in (with BP-303)	
Weight (approximate)		320 g, 11.3 oz (with BP-303)	
Bluetooth® technology		Version: 4.2, Output: Class 2, Protocol: HFP, HSP	
LTE (4G)/W-CDMA (3G)		IP730D & IP740D	
Network	EUR, EXP	LTE (4G): B1, B3, B7, B8, B20	W-CDMA: B1, B8
	USA	LTE (4G): B2, B4, B12	W-CDMA: B2, B5
	AUS, EXP	LTE (4G): B1, B3, B5, B7, B8, B28	W-CDMA: B1, B5
Rated output power		0.25 W	
Receiver sensitivity (QPSK)		-102 dBm typ.	
Compatibility		IP510H, IP504H, IP503H, IP501H, IP-M60, IP501M, IP500APP, VE-PG4	
IDAS™ digital/Analogue		IP730D	IP740D
GENERAL			
Frequency range* (* Depending on the version)		136 – 174 MHz	350 – 470 MHz, 400 – 520 MHz
Number of conventional channels		128 channels /8 zone	
Type of emission* (* Depending on the version)	USA	11K0F3E (15.0 kHz), 4K00F1E, 4K00F1D (6.25 kHz)	
	EUR, EXP, AUS	8K50F3E (12.5 kHz), 4K00F1E, 4K00F1D (6.25 kHz)	
TRANSMITTER			
Output power (Hi, L2, L1)		5 W, 2 W, 1 W	
Frequency stability		±1.0 ppm	
Spurious emissions		90 dB typ. (TIA-603)	
FM hum and noise (Without CCITT filter)		0.25 µW (≤ 1 GHz), 1.00 µW (> 1 GHz) (EN301 166, EN300 086)	
FSK error		60 dB typ. (TIA-603)	
		5% max. 1% typ. (EN301 166)	
RECEIVER			
Sensitivity	Digital (1% BER)	-6.5 dBµV emf typ. (0.24 µV typ.) (EN301 166)	-7 dBµV emf typ. (0.22 µV typ.) (EN301 166)
	Analogue (12 dB SINAD)	0.22 µV typ. (TIA-603)	0.17 µV typ. (TIA-603)
	Analogue (20 dB SINAD)	-2 dBµV emf typ. (0.4 µV typ.) (EN300 086)	-2 dBµV emf typ. (0.4 µV typ.) (EN300 086)
Adjacent channel selectivity	Digital	62 dB typ. (EN301 166)	63 dB typ. (EN301 166)
	Analogue	67 dB typ.	67 dB typ.
Intermodulation rejection	Digital	76.5 dBµV emf typ. (EN301 166)	73 dBµV emf typ. (EN301 166)
	Analogue	74 dB typ. (TIA-603) 67 dB typ. (EN300 086)	72 dB typ. (TIA-603) 66 dB typ. (EN300 086)
Hum and noise (Without CCITT filter)		60 dB typ. (TIA-603)	60 dB typ. (TIA-603)

Measurements made in accordance with 3GPP TS-36, TIA-603, EN300 086 and EN301 166.

All stated specifications are subject to change without notice or obligation.

Applicable U.S. Military Specifications & IP Rating

Standard	MIL 810G	
	Method	Procedure
Low Pressure	500.5	I, II
High Temperature	501.5	I, II
Low Temperature	502.5	I, II
Temperature Shock	503.5	I-C
Solar Radiation	505.5	I
Rain Blowing/Drip	506.5	I, III
Humidity	507.5	II
Salt Fog	509.5	-
Dust Blowing	510.5	I
Immersion	512.5	I
Vibration	514.6	I
Shock	516.6	I, IV

Also meets equivalent MIL-STD-810-C, -D, -E and -F.

IP Rating

Ingress Protection Standard	
Dust & Water	IP67 (Dust-tight and waterproof)


Battery Life

Battery Pack	Type	Capacity	Operating time*		
			LTE	VHF	UHF
BP-303	Li-ion, 7.2V	3350 mAh (typ.) 3200 mAh (min.)	Up to 24 hours	Up to 13 hours (at 5 W) Up to 15 hours (at 1 W)	

* Bluetooth® OFF, Backlight OFF, Duty cycle TX: RX: Stand-by = 5: 5: 90 ratio.

I OPTIONAL ACCESSORIES

SPEAKER MICROPHONES and EARPHONES

**HM-245T**DTMF microphone
with sub PTT buttonWater
proof

(3.5 mm plug)

HM-222H

High-power speaker

Water
proof


(3.5 mm plug)

AD-135Earphone
jack adapter

(3.5 mm plug)

SP-27

Tube earphone

**SP-29**Earhook
earphone**SP-40**

Earphone



TIE-CLIP MICROPHONES and EARPHONES

**HM-238MC**Tie-clip microphone
with sub PTT button

(2.5 mm plug)

**HM-163MC**

Tie-clip microphone

(2.5 mm plug)

**EH-15B**

Earphone

**SP-26**

Tube earphone

**SP-28**Earhook
earphone

HEADSETS and PTT SWITCH CABLE

**HS-94**Earhook type
headset**HS-95**Neck-arm type
headset**HS-97**Headset with
throat microphone**VS-5MC**PTT switch cable for manual
PTT, and VOX operation

BLUETOOTH® HEADSET

VS-3Bluetooth®
headset

SPEAKER MICROPHONES

HM-184HHigh-power
speaker typeWater
proof**HM-236**

Compact type

Water
proof

BATTERY PACK and BATTERY CASE

BP-303Li-Ion battery pack
3200 mAh (min.)
3350 mAh (typ.)
(Same as supplied)**BP-305**Battery case
LR6 (AA)×5
cells

CHARGERS

BC-226Multi-connectable
rapid charger**BC-123S**AC adapter for
single unit

(The straight plugtype is required)

BC-228AC adapter
(Required for multiple
connections)

(Connectable up to six BC-226)

BC-227

(AC adapter BC-123S supplied)



MULTI-CHARGER

BC-214N (#62-#63)AC adapter BC-157S is
supplied, depending on the
charger version

CARRYING CASE

LC-195Carrying case
(Charging is
possible while the
case is attached)**CP-23L**For use with
BC-227**OPC-515L**For use with
BC-227

BELT CLIPS AND HANGERS

MB-133

Belt clip (Same as supplied)

MB-136

Belt clip (Swivel type)

MB-96N

Belt hanger (Swivel type)

MB-96F

Belt hanger (Fixed type)

MB-96FL

Belt hanger (Long type)

ANTENNAS

Standard Antennas

FA-SC25V 136-150 MHz
FA-SC55V 150-174 MHz
FA-SC28V 148-162 MHz
FA-SC29V 160-174 MHz
FA-SC25U 400-430 MHz
FA-SC57U 430-470 MHz
FA-SC72U 470-520 MHz
FA-SC01U 350-400 MHz
FA-SC02U 330-380 MHz
FA-SC03U 380-430 MHz

Stubby Antennas

FA-SC26VS 136-144 MHz
FA-SC27VS 142-150 MHz
FA-SC56VS 150-162 MHz
FA-SC57VS 160-174 MHz
FA-SC26US 400-450 MHz
FA-SC73US 450-490 MHz

High Gain Antennas

FA-SC62V 155 MHz
FA-SC63V 160 MHz

Cut Antennas

FA-SC81VC 136-174 MHz
FA-SC61UC 380-520 MHz

All stated specifications are subject to change without notice or obligation.

Icom and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. IDAS, IDAS logo and AQUAQUAKE are trademarks of Icom Incorporated. NXDN is a trademark of Icom Incorporated and JVC KENWOOD Corporation. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Icom Inc. is under license. IOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license. Android is a trademark of Google LLC.

All other trademarks are the properties of their respective holders.

Check the Icom
website for details.

Icom Inc.

1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icomjapan.com

Icom America Inc.
www.icomamerica.comIcom (Europe) GmbH
www.icomeurope.comIcom France s.a.s.
www.icom-france.com

Your local distributor/dealer:

Icom Canada
www.icomcanada.comIcom Spain S.L.
www.icomspain.comIcom (Australia) Pty. Ltd.
www.icom.net.auIcom Brazil
E-mail: sales@icombrasil.comIcom (UK) Ltd.
www.icomuk.co.ukIcom Asia Co., Ltd.
www.icomasia.com